Moving a Failed eMAR to the Transmission History

The *eMAR Type* application setting, found within the *MDS Category*, must be set to *Enhanced* in order to access the eMAR Transmission Manager.

Once a failed eMAR has been successfully resent, it will automatically be removed from the *Outbox* tab within the eMAR Transmission Manager. In instances such as where the failed transmissions do not need to be resent, you can move these from the *Outbox* tab to the *Transmission History* tab.

1. To begin, open the eMAR Transmission Manager from the ProScript Connect Main Screen by clicking the **[ProScript Connect]** menu button and selecting the *eMAR Transmission Manager* menu item.
2. From the eMAR Transmission Manager, open the *Outbox* tab. Highlight a failed transmission in the grid, which will display with a Failed tag.

You can only move failed transmissions to the *Transmission History* tab.

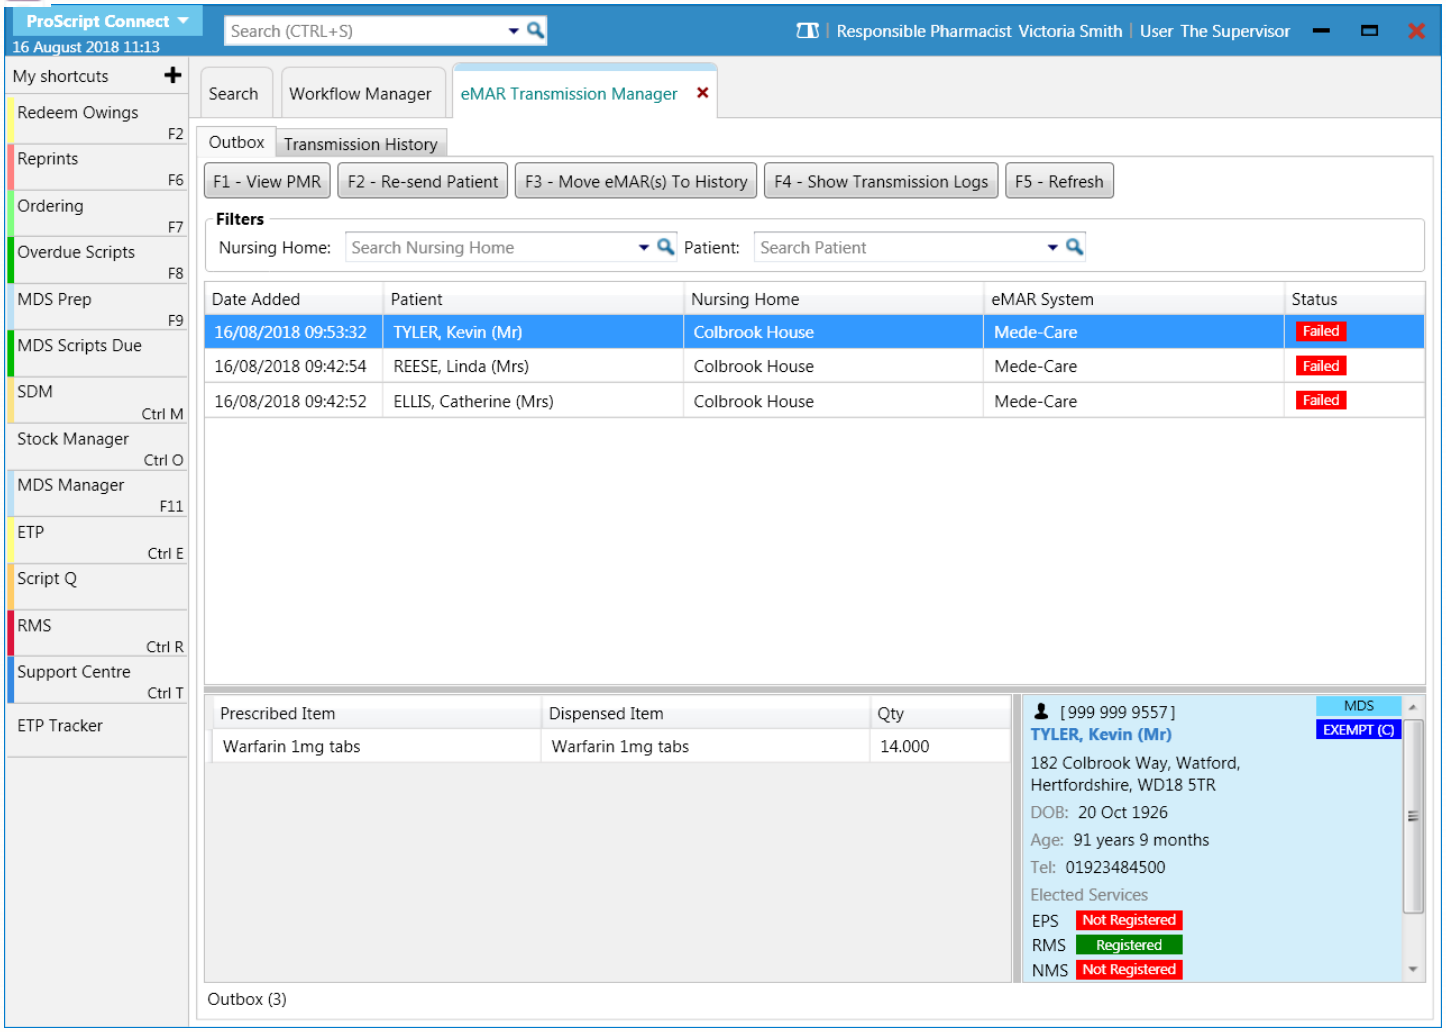

3. Select the **[F3 – Move eMAR(s) to History]** button.

A McKesson Company

4. The eMAR will be moved to the *Transmission History* tab, where it is marked with a Failed tag.

You can amend the *Status* filter on the *Transmission History* tab to view *All*, *Completed* or *Failed* transmissions.

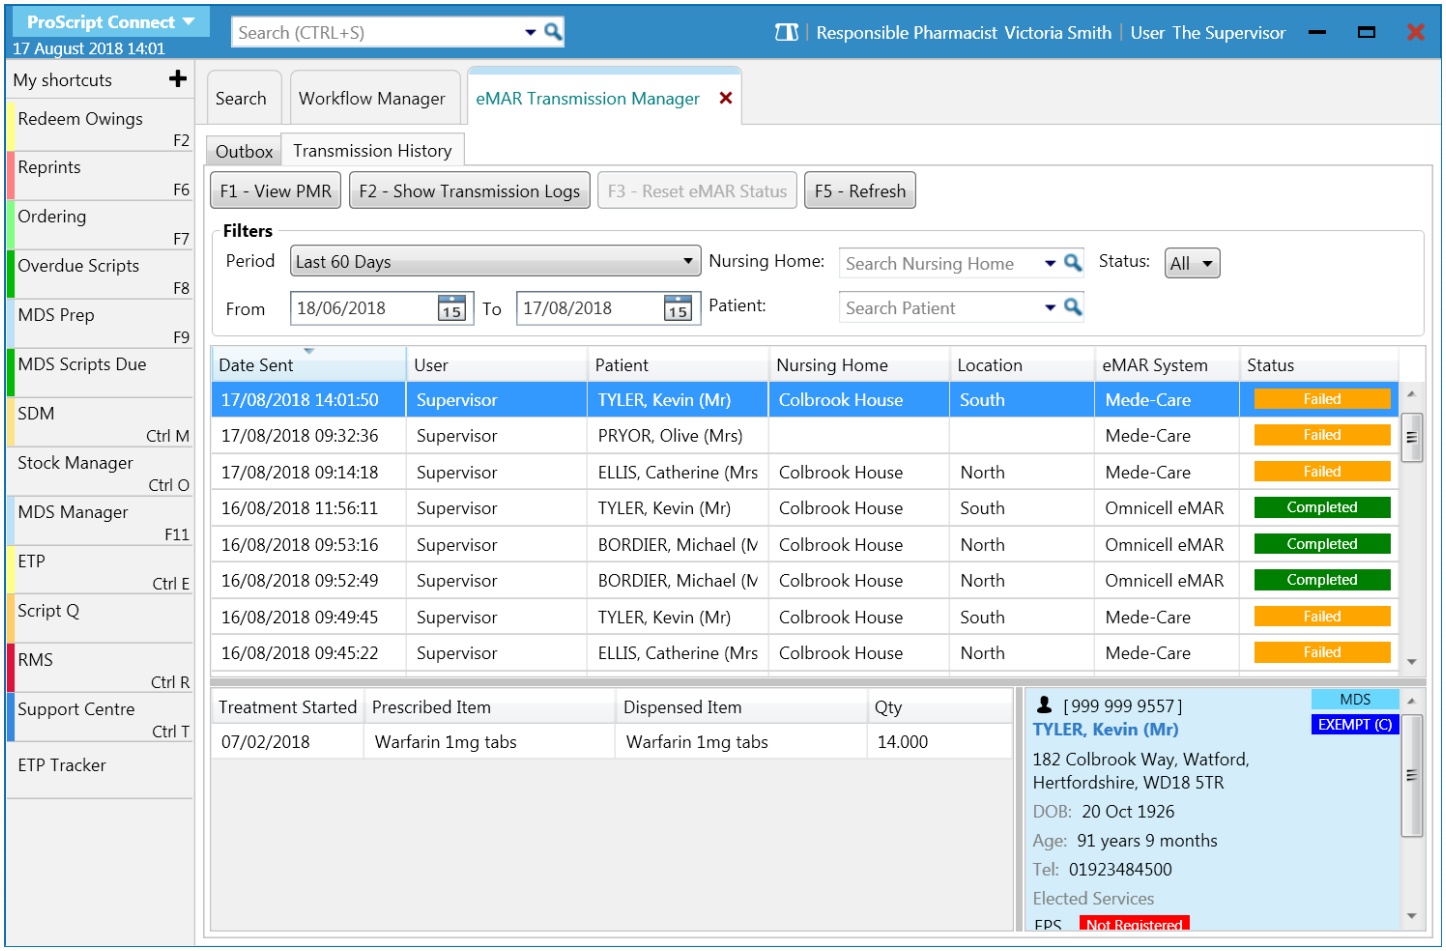

Revision History

Version Number	Date	Revision Details	Author(s)
1.0	04 January 2021		Elyas Khalifa

Contact us

For more information contact:
Telephone: 0344 209 2601

Not to be reproduced or copied without the consent of AAH Pharmaceuticals Limited 2020